


PRODUCT DATASHEET

LED GU10 FRAME 7 W 3000-6500 K

LUMBIENT LED Spotlight Frame 02 – GU10 with IP44 Glass Cover

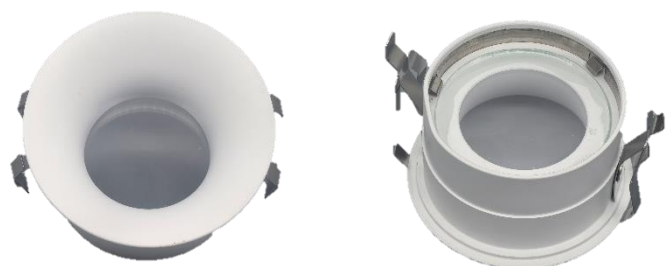

AREAS OF APPLICATION

- Toilets
- Wet Areas
- Showers
- Kitchens
- Living Rooms

TECHNICAL DATA

Electrical data

Nominal wattage	7 W
Nominal voltage	100-240 VAC
Power Factor	>0.9
Mains Frequency	50 Hz

Photometrical data

LED Chip	Bridgelux
Color temperature	3000 K - 6500 K
Luminous flux	560-600
Luminous efficacy	80-90 lm/W
Standard deviation of color matching	≤5 sdcn
Light color (designation)	Warm White – Cool White - Day Light
Color rendering index Ra	>90

Light technical data

Beam angle	24-60°
------------	--------

Dimensions

Shape	Round
Dimensions	D65xH35 mm
Cut hole Size	D60 mm

Colors & materials

Body material	Aluminum
Housing color	White

Temperature & operating conditions

Ambient temperature range	-20°C ~ +45°C
---------------------------	---------------

Lifespan

Lifespan L70 at 25 °C	30,000 h
Number of switching cycles	100,000

Additional product data

Mounting type	Recessed
Mounting location	Ceiling

Certificates & standards

Protection class	II
Type of protection	IP 44
Standards	CE/RoHS

